

PBU(B) Series

Multi-Range, Remote Mount, Block UpConverters



High Grade Block UpConverter Products;

PBU2000	L-Band (950-1950MHz max) to Ku-Band (12.75-14.50GHz) 2 ranges.
PBU3000	L-Band (950-1700MHz max) to Ku-Band (12.75-14.50GHz) 3 ranges.

For other non-standard frequency requirements, please contact the factory.
 For single-range Block UpConverters please see PBU(A) series datasheet.
 For equivalent rack mount units, please see IBU(B) & IBUH(B) series datasheets.

The remote mounted **PBU(B) series** of Multi-range Block Frequency UpConverter units from Peak Communications are designed to accept an incoming L-Band signal from a Modulator/ Modem or IF to L-Band synthesised UpConverter (typically a **P7002**) and produce an output at SHF that is suitable for direct connection to a high power Amplifier.







The **PBU(B) series** of units are DC powered and are constructed of high grade components to give the ultimate performance. They utilise Externally Phase Locked Dielectric Resonator Oscillators (XPDR Os) and are far superior in stability and phase noise to Voltage Controlled Oscillators (VCOs), as commonly used in other BUC designs.

These Multi-range converters are offered with internal range switching and a single input and output connection. Range selection is performed via remote control or via an optional 'local' discrete interface.

For control, the unit incorporates a serial communications interface as standard and an optional Ethernet interface that supports control from a web-page or SNMP network management system. The **FPC100** is also offered which is a standard 19" rack mount control unit that can interface with up to three **PBU(B)** units plus the 1+1 or 2+1 redundancy systems.

For redundancy, the **PBU(B)** uses a simple CANBUS® interface and has an integral redundancy controller for 1+1 & 2+1 operation (for use with external **T1000HR**, **T2000HR** switch units).

Peak Features

-  High stability, low ripple and excellent phase noise, using PDRO technology
-  10MHz External Reference option fitted as standard with automatic internal reference back-up
-  Full Alarm monitoring
-  Integral 1+1 & 2+1 CANBUS® redundancy control & external switch units available
-  Full remote control including optional Ethernet with embedded web server and SNMP NMS
-  Compact weatherproof design



PBU(B) series - Typical Specification

SHF Output

Frequency	12.75-14.5GHz (2 ranges), 12.75-13.75, 13.75-14.50GHz
PBU2000	
PBU3000	12.75-14.5GHz (3 ranges), 12.75-13.50, 13.00-13.75, 13.75-14.50GHz
Connector	N-Type (f), 50Ohms
Return loss	>18dB
1dB GCP	+8dBm

L-Band Input

Frequency	950-1950MHz
Spectrum Sense	Non inverting
Connector	N-Type (f), 50Ohms
Return loss	>15dB

Transfer Characteristics

Conversion gain	17dB \pm 1dB at band centre
Gain stability	\pm 0.5dB from 0 to 50°C
Gain flatness	\pm 1dB across each sub-band (\pm 1.5dB if bandwidth >800MHz)
	\pm 1.5dB across full Ku-band
	\pm 0.5dB across any 40MHz in band

RF Performance

LO Phase noise (typical with good phase noise ext. 10MHz ref)	-55dBc/Hz at 10Hz -75dBc/Hz at 100Hz -92dBc/Hz at 1kHz -100dBc/Hz at 10kHz -107dBc/Hz at 100kHz -125dBc/Hz at 1MHz
Spurious	<-80dBm (in band non-carrier related) <-75dBc (in band carrier related)
3rd Order Intercept	>+18dBm
LO leakage	<-80dBm (always out of band)

External Reference Input

Frequency	10MHz
Connection	TNC(f), 50 Ω
Option 6;	Fed in via the L-Band cable
Level	0dBm \pm 3dB
Required phase noise	better than 50dBc/Hz of output Phase Noise
Locking delay	<2 minutes to stabilise from cold

Internal back-up reference

Stability	<1 x 10 ⁻¹⁰ per second
Temp. Stability	< \pm 5 x 10 ⁻⁸ (0 to +50°C)
Ageing	< \pm 5 x 10 ⁻⁹ per day

Mechanical

Dimensions	290 x 230 x 95mm (11.4 x 9.1 x 3.7inch)
Construction	Die-cast Aluminium, Weatherproof
Weight	Approx. 4kgs (9lbs)

Environmental

Operating temp	-10°C to +50°C (less Solar gain)
EMC	EN55022 part B & EN50082-1
Safety	EN60950

Power supply

Voltage	36VDC
Power	35 Watts max.
Connection	circular weatherproof (mating part supplied)
Option 4a;	DC input via the L-Band interface.
Option 4b;	DC input via the L-Band interface as well as wired to the power/alarms connector.

Control System

Alarms	Summary failure relay (form C)
Option 5;	Removal of 'Ext Ref lock' alarm
Note;	External reference 'lock' alarm is included in the summary alarm as standard, this can be removed if an external reference is not being provided.
Remote Control	RS232/ 485 port
Option 9;	Ethernet option; embedded web server & SNMP network management support
Option 3 ;	Local interface for discrete signal control of range switching
Redundancy	CANBUS [®] interface & in-built 1+1 & 2+1 controller

Options


- 3) Local interface providing discrete signal control of range switching.
- 4a) DC input feed via the L-Band interface.
- 4b) DC input feed via the L-Band interface, as well as wired to the 5-pin 'alarms' connector.
- 5) Removal of Ext. Ref. 'lock' alarm from summary alarm.
- 6) External reference fed in on the L-Band cable
- 9) Ethernet interface with embedded web server & SNMP.

Notes; Other 'PBU' options do not apply to these products.

The addition of Options can modify the typical specification, for details please consult the factory.



Connector panel view (sample)

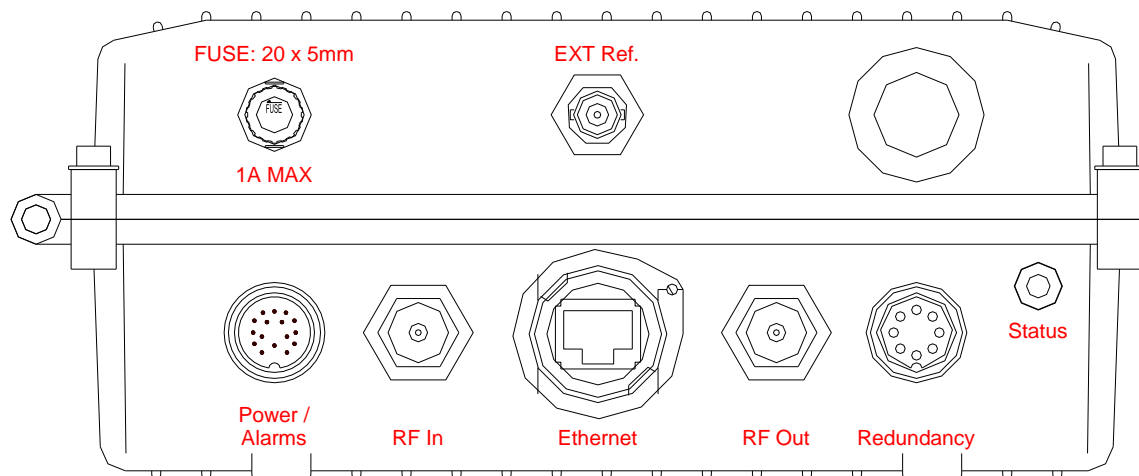

Peak Communications reserves the right to alter the specifications of this equipment without prior notice. PBU(B)series-250112.

Peak Communications Ltd, 22 West Park Street, Brighouse, HD6 1DU, England

Tel; +44 (0)1484 714200 Sales; +44 (0)1484 714229 Fax; +44 (0)1484 723666 Email; sales@peakcom.co.uk Web; www.peakcom.co.uk